

# Divia

The perfect execution  
of a masterpiece without  
any compromise




**DIVA REDEFINES STANDARDS  
IN THE INDUSTRY OF PATIO  
DOORS. ITS RENEWED  
APPEARANCE IS COMBINED  
TO UNEQUALLED PERFORMANCE  
WITH RESPECT TO ENERGY  
EFFICIENCY, SOLIDITY AND  
SECURITY.**



**Royal Window and Door Profiles**  
Great Ideas Taking Shape

ROYALPLAST DIVISION


[www.royalplast.ca](http://www.royalplast.ca)

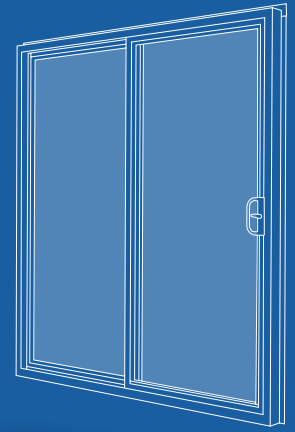

The Diva patio door confirms the commitment to make it an uncompromisingly superior product for either new construction or renovation projects.

### STANDARD FEATURES

- ▶ The Diva patio door has a 4 5/8" all PVC frame with integral nailing fin.
- ▶ The Diva patio door is offered standard with multipoint lock for added security.
- ▶ Sloped sill for optimal water drainage.
- ▶ The Diva patio door is suitable for new construction or remodeling.
- ▶ All sashes are fusion welded for more strength.
- ▶ Fully reversible - can be assembled to slide left or right.
- ▶ The opening sash integrates double tandem adjustable rollers for smooth and easy operation on anodized aluminum tracks.
- ▶ Full perimeter weatherstrip forms a positive seal between frame and panels.
- ▶ Multichamber insulating PVC profiles to provide maximum comfort.
- ▶ Strong interlocking meeting rail for air tightness.
- ▶ The vertical stiles are reinforced with metal.
- ▶ The sill is made of reinforced PVC for greater resistance.
- ▶ The Diva patio door uses heavy duty aluminum extrusions for screen.
- ▶ The screen can be locked from the inside.
- ▶ With or without nailing fin.

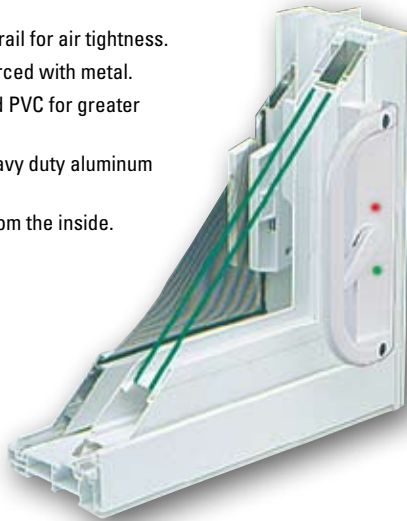

### OPTIONS

- ▶ Garden door with insulated and embossed PVC panels.
- ▶ Exterior key lock.
- ▶ Security bar.
- ▶ Outside sill extension.
- ▶ Interior brass handle.
- ▶ Foot lock.
- ▶ Glazing options Low-E<sup>2</sup> with Argon Gaz and XL edge spacer, tinted, glass and grilles.
- ▶ Sidelites

### COLOR OPTIONS

Blue White #141 / Cream White #151 / Tan-Beige #349.

Painted colors available using the Royal Bond™ Spectracoat™ Technology.



### PERFORMANCE

	CAN	AAMA/NWWDA 101/I.S 2.97
Air tightness	A3	DP-40 Optional DP-50
Water Resistance	B4	
Wind Load Resistance	C2 (C3*)	
Forced Entry	F2	
Ease of Operation	E3	
Window Resistance	CSA	
ENERGY STAR™	A, B Zones	All Zones

\* Optional: DP-50 configurations available up to 72" x 80".

### STANDARD SIZES

	O X O*	O X O*	O X O*	X O X	X O X	X O X	O X X O	O X X O	O X O*	O X O*	HEIGHT
Exterior-frame Dimensions	59 1/4"	71 1/4"	95 1/4"	88 13/16"	104 13/16"	140 13/16"	116 3/4"	140 3/4"	107 3/4"	143 3/4"	79 1/2"
Minimum Rough Opening	60"	72"	96"	89 13/16"	105 9/16"	141 9/16"	117 1/2"	141 3/4"	108 1/4"	144 1/2"	80"
	<b>WIDTH</b>										<b>HEIGHT</b>

\* Also available in 8/0 height (95 1/4") for the 2-panel doors Custom sizes available upon request \* 9' and 12' units are constituted of a standard 6' or 8' door mullied to a sidelite. X = Operating Sash O = Fixed Sash

**WARRANTY** RoyalPlast patio doors are delivered with a limited warranty: 20 years on PVC / 20 years on seal failure of glass / 1 year on operation.



ROYALPLAST DIVISION

LACHENAIE  
1 866 777.1210  
www.royalplast.ca

